

# gULP Filter System



the gULP Filter System is a uniquely new Koi pond filter that combines ultimate flexibility with a durable easy to work with modular system.

- Maximum flow rates at low head
- No energy guzzling pools pumps needed
- Small foot print
- Highly efficient
- Super easy maintenance
- Easy to install
- Can handle any media internally
- Can even be run as a Bakki shower
- Can be combined with other filter systems
- 110mm piping can be used throughout
- Self supporting, will not warp or bend over time
- Large sump allows flexible drainage
- Internal shelf supports for stainless steel shelves
- Suitable for small and large Koi ponds.

gULP features flat surfaces on all four sides to allow complete connectivity flexibility. gULP can be installed for maximum compactness.

gULP features a sloped bottom that terminates in a large sump. This allows all dirty water to be purged easily as well as allowing maximum drainage line flexibility.


gULP can be configured to flow water up/down/under/over/sideways or in any combination you prefer.

Optional stainless steel shelves can be easily fitted to gULP. Up to three such shelves can be fitted internally.


gULP also ships with an easy access sturdy lid.

gULP is completely scalable. It can be scaled up from running small Koi ponds right up to the biggest Koi ponds built. gULP can be changed or reconfigured at any time and you can add to the gULP system at any stage. gULP is easy to connect and easy to change - all you need is a screw driver, a hacksaw and some pipe.

# gULP Filter System

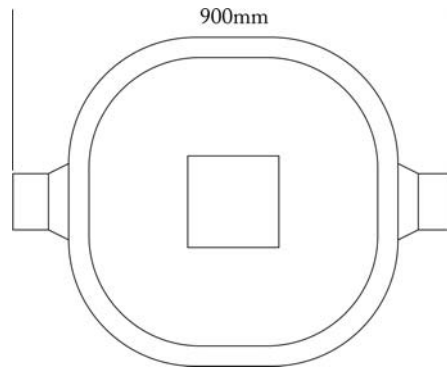

gULP features inlaid rests for brush racks at the correct spacing to ensure a tight brush packing. gULP will accommodate 14 x 400mm brushes which can be easily hosed down from above during maintenance.

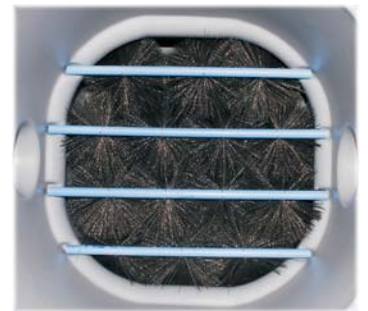


gULP on the inside



gULP is designed to take stainless steel baffle plates or shelves, up to three of them if required, to ensure maximum media compatibility.

gULP has oversized outlets feeding the external 110mm pipe outlets to prevent any restriction to flow rates when using SuperActiFlo media screen plates

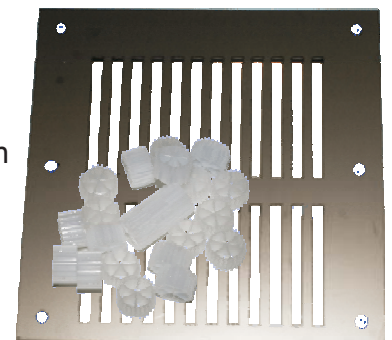

gULP is easily connected using screw on rubber pipe connectors (right) or via rubber flanges (left) which can be installed on any of the flat sides of gULP. All you need is a screw driver and a bit of pipe. 110, 63 and 50mm rubber flanges can be used.

(Gulp can also be connected using standard pressure fit plumbing fittings secured directly onto the 110mm outlets)

